

Project Name: _____ Part Number: _____ Date: _____
--

Features

- Circuit Relay
- 0-10 V Dimming (Linear Response)
- Emergency Lighting (UL924 rated)
- Plug Load
- Plenum Rated
- Bluetooth App Configuration
- CheckLight equipped



ASHRAE 90.1 Compliant



The Douglas Lighting Controls **Bluetooth** Controller includes Plug Load Control and Energy Management capabilities. The wireless load controller is line voltage powered and plenum rated for installation in a variety of applications. An onboard relay and 0-10V dimming control the light fixture or multiple fixtures. The Douglas Lighting Controls Wireless ecosystem includes wall station switches for ON-OFF-DIM-PRESET control while the ceiling mounted occupancy and daylight sensor provides occupancy control and daylight harvesting. Each device within the wireless ecosystem communicates through a Bluetooth wireless mesh network.


Plug Load Control is configured through the configuration App to meet specific building code requirements. Energy Management technology has been incorporated to measure circuit energy usage through our CheckLight™ Energy Management and Energy Monitoring platform.

Emergency Lighting Control is also offered through the controller by supplying a backup power source to that fixture and designating it as an emergency fixture through the configuration App

The Controller is easily installed using the 1/2" chase nipple and the included flying leads for power and dimming. Simply provide power to the controller and wire the controller to the light or group of lights you would like to control. Plenum ratings provide the flexibility to install the controller in a variety of locations, then use the smartphone app for convenient done at deck level configuration.

Typical Applications: Lighting Controls for new or upgraded/retrofits projects.

PART NUMBER	DESCRIPTION
BT-PP20-B	Bluetooth load controller, Emergency, Plug Load, Energy Management

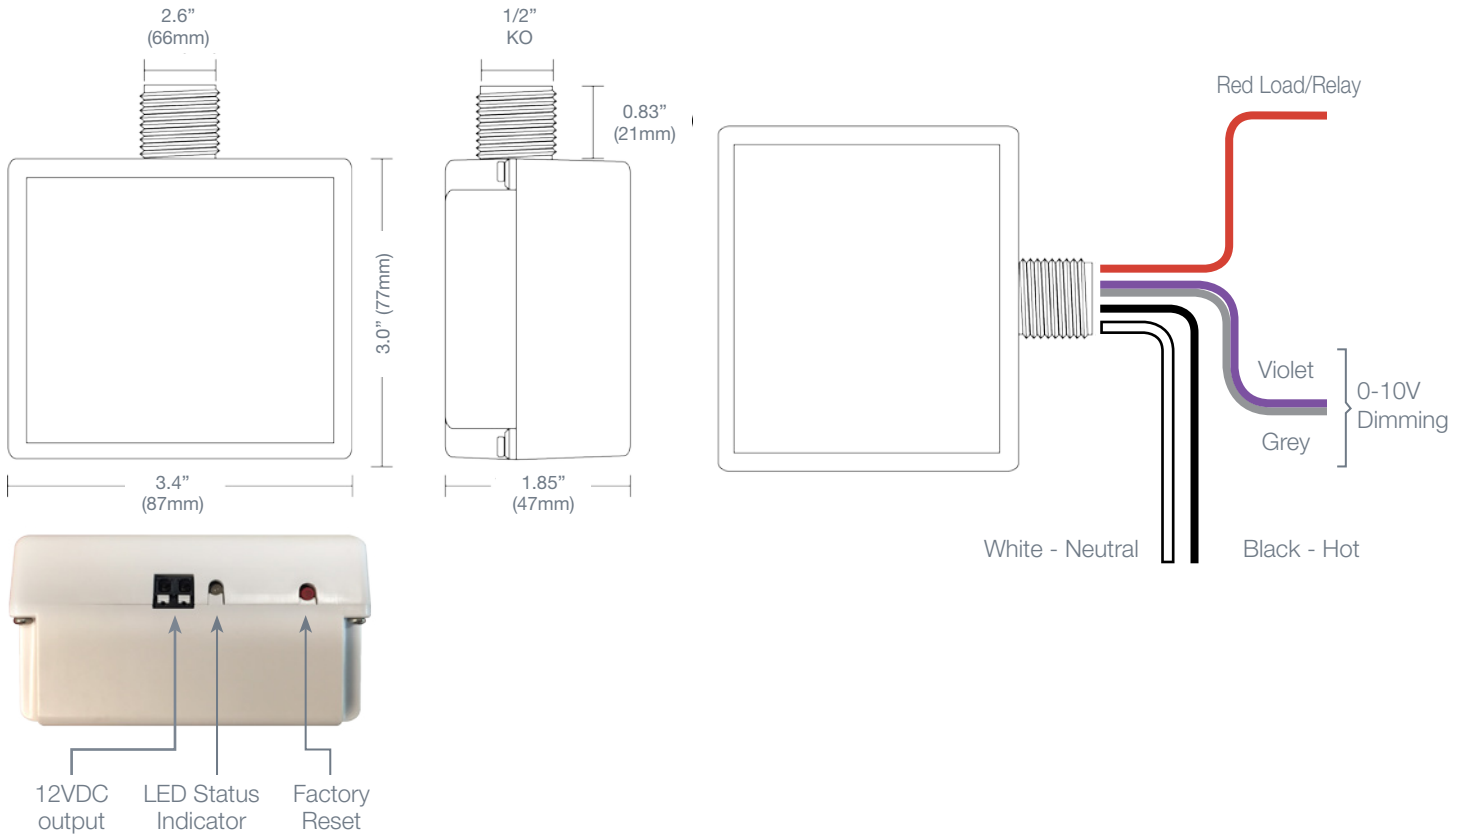

FUNCTIONALITY	<ul style="list-style-type: none"> ON/OFF load control, 0-10V dimming, Open ADR Ready Download Douglas Lighting Controls App from Apple App store for configuration See Installation Manual for complete details
INPUT VOLTAGE	<ul style="list-style-type: none"> 120/277/347VAC 60Hz
AUX. OUTPUT	<ul style="list-style-type: none"> 12VDC, 30mA output for Douglas Lighting Controls Bluetooth Occupancy/Daylight sensor BT-WOR-A (max. 2)
RANGE	<ul style="list-style-type: none"> 150' Clear line of site. 50' through standard walls (distances may vary based on location and environment. Additional devices may be required at time of commissioning to ensure Bluetooth network integrity.)
LOAD RATINGS	<ul style="list-style-type: none"> 800W @ 120VAC standard ballast 1200W @ 277VAC standard ballast 3300W @ 277VAC electronic ballast 1500W @ 347VAC standard ballast Relay: 20A General Use 100mA sink current (0-10V dimming channel)
APPROVALS	<ul style="list-style-type: none"> ETL Listed Conforms to UL STDS: 508, 1310, and 924 Certified to CSA STD. C22.2 #14 and #223 ETL Classified Conforms to UL STD. 2043 Certified to ULC/ORD STD C2043 ASHRAE 90.1 Compliant CEC Title 24 Compliant Contains IC: 8254A-B1010SP0 Contains FCC ID: W7Z-B1010SP0
ENVIRONMENT	<ul style="list-style-type: none"> Indoor, stationary, non-vibrating, non-corrosive atmosphere and non-condensing humidity Operating temperature: 32°F to 104°F (0°C to 40°C) Storage temperature: 14° to 140°F (-25° to 60°C)
WARRANTY	<ul style="list-style-type: none"> Standard 1-year